

# Strain Gauge Amplifier (RLVBSGA01)



The RLVBSGA01 is a two-channel user adjustable strain gauge amplifier. Each channel is DC isolated and designed for full-bridge operation, but can be adapted for use in half-bridge and quarter-bridge applications.


The output range of each channel is  $\pm 9\text{v}$  with input signal gain adjustable from approximately 25 to 1000.

Wire connection to the amplifier is via screw terminal contacts for simple fitting.



## Features

- DC isolated channels
- 90dB typical CMRR
- Adjustable gain from 25 to 1000
- Dual channel

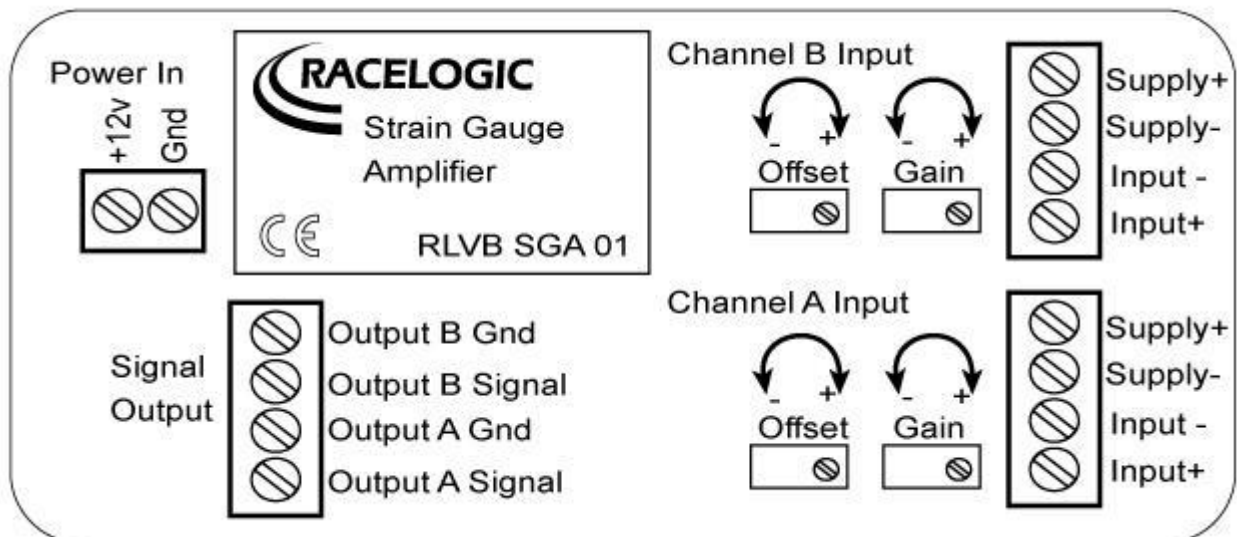


# Strain Gauge Amplifier

(RLVBSGA01)




Specification	
Supply Voltage	6v – 18vDC
CMRR	Typically 90 dB (minimum 77dB)
Bridge Supply Voltage	5v ± 2mV
Gain	Adjustable from 25 to 1000
Output Range	±9v
Operating Temperature	0°C to +70°C
Storage Temperature	-40°C to +85°C
Frequency Bandwidth	DC to KHz

## Typical Application

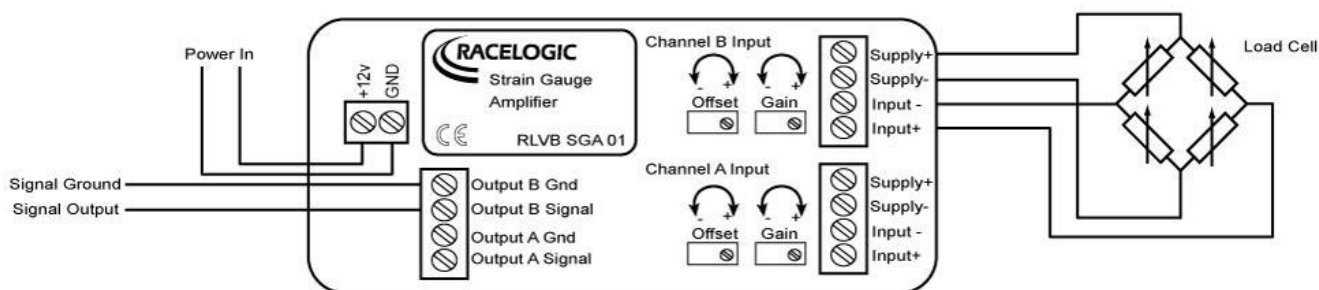

The Strain Gauge Amplifier can also be used in half-bridge and quarter-bridge applications. Please refer to the user manual for more information.

## External

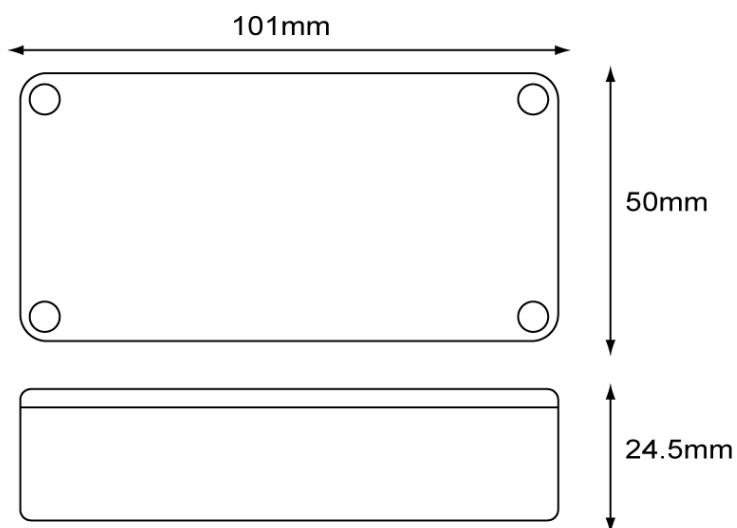

## Dimension

