


DSP06CABL-L

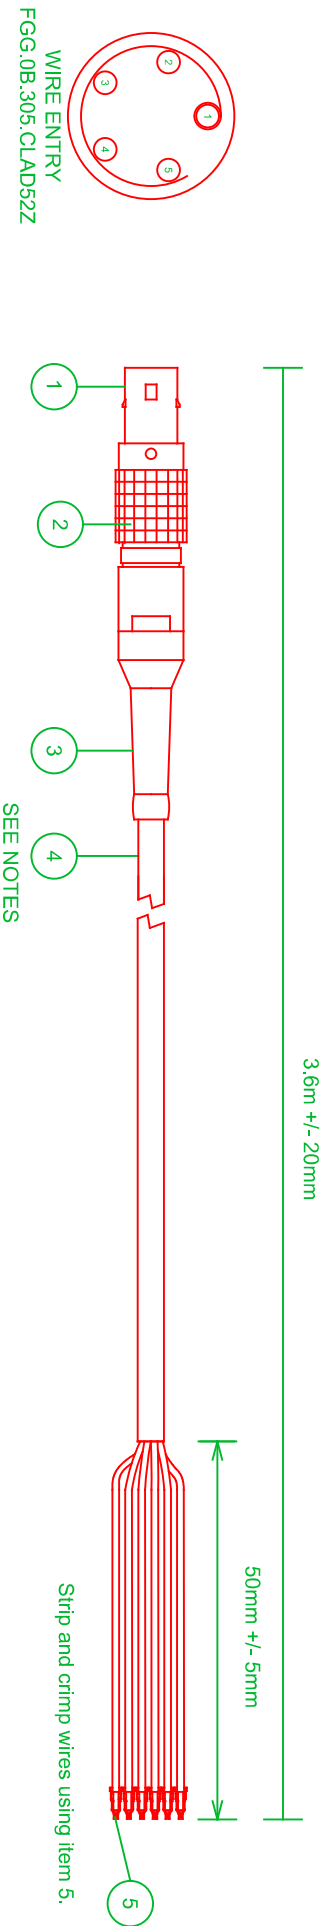

- NOTES:**
- Cut the cable (Item 4) to length.
 - Connect the the LEMO connector as per the connection table.
 - Terminate the braid to the upper clamshell or to the collet.
 - Strip back the outer insulation of the cable on the Molex end as per the drawing.
 - Strip and crimp the wires into the Molex Pico Ezmate crimps.
 - Use either LCPRN062801 or CF107 as Item 4 Cable.

BILL OF MATERIALS

ITEM	QTY	MANUFACTURER	MANUFACTURER P/N	DESCRIPTION	RACELOGIC P/N
1	1	LEMO	FGG.0B.305.CLAD5ZZ	LEMO 5 WAY PLUG	LEMO 5W P
2	A/R	PRO POWER	SP3X15/5/BLACK	HEATSHRINK BLACK 1.5mm 3:1	119-1021
3	1	LEMO	GMA.0B.030.DN	LEMO STRAIN BOOT	GMA.0B.030.D
4	3.6m	GUANGZHOU	LCPRN062801	6 CORE + SCREEN CABLE BLACK	LCPRN062801
4	3.6m	CONCEPT CABLES	CF107	6 CORE + SCREEN CABLE BLACK	CF107
5	6	MOLEX	781720411	MOLEX PICO-EZMATE CRIMP	

CONNECTION TABLE

5W LEMO	FUNCTION	COLOUR	COLOUR	PICO EZMATE CRIMPS
PIN 1	OLED Rx 232	BROWN	WHITE	1
2	OLED TX RS232	YELLOW	GREY	2
SHELL	GND	BLACK	BLACK	3
4	CAN L	GREEN	TURQUOISE	4
3	CAN H	ORANGE	TAN	5
5	POWER	RED	PINK	6
SHELL	SCREEN	BRAID	BRAID	N/C

DRAWING NUMBER	DSP06CABL-L	DRAWN	H.HUSSAIN	SHEET	1/1
DESCRIPTION	MOTORSPORT DISPLAY CABLE				
REVISION					
ISS	DESCRIPTION	DATE	APPROVED	REDMINE	
6	ADDITIONAL CABLE OPTION ADDED	26-06-24	SH	23446	